


# Configurazione source nat dinamico (IP Masquerading)

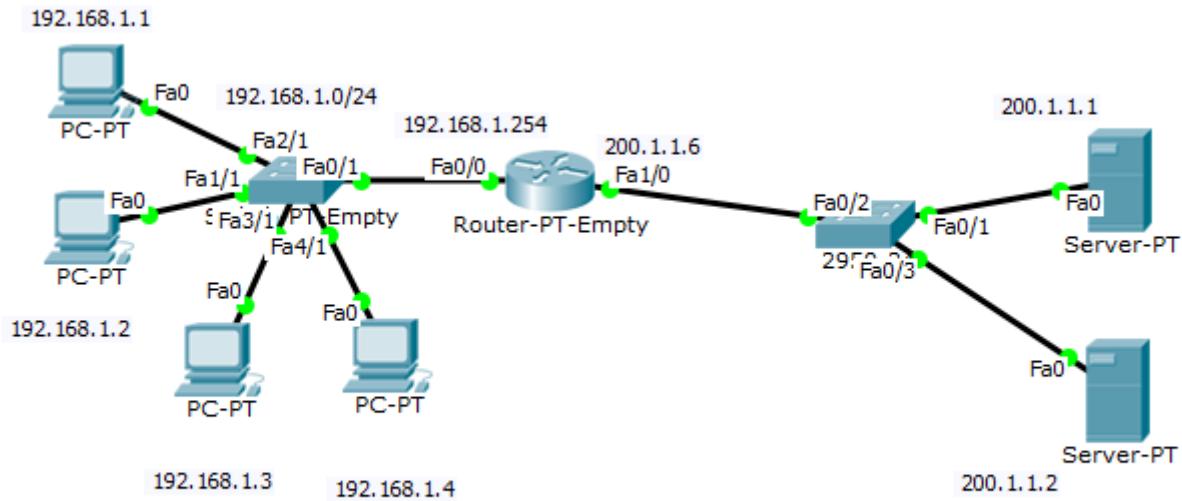

```
enable
configure terminal
interface FastEthernet0/0
    ip address 192.168.1.254 255.255.255.0
    ip nat inside
```

```
interface FastEthernet1/0
    ip address 200.1.1.6 255.255.255.248
    ip nat outside
```

```
ip nat pool IndirizziNAPT 200.1.1.6 200.1.1.6 netmask 255.255.255.248
access-list 10 permit 192.168.1.0 0.0.0.255
ip nat inside source list 10 pool IndirizziNAPT overload
```